GRADER HARDFACING



A.R.M.* HARDFACING offers...



A.R.M.* 24H Serrated after 600 hours.

- Substantially REDUCED Costs
- Greatly IMPROVED Productivity
- > and MINIMISED Downtime

Eliminate the Task – Elimate the Risk!

Utilise A.R.M.* Hardfacing for safer, cheaper & consistent results on site - **GUARANTEED!**




SAVING MONEY — SAFELY!





LH end wear rate A.R.M.* Semi-Serrated on 24M – after 800 hours.

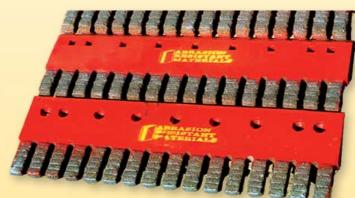

A.R.M.* 24H-M Normal Serrated - Patent granted.



The same and

A.R.M.* 16H Semi-Serrated – 2 x inch spacing.

A.R.M.* 60mm thick Serrated 24H-M Edge.



A.R.M.* 24M Semi-Serrated at 3,500 hours.





A.R.M.* 24H Semi-Serrated - Patented.

10" wide Heavy Duty Serrated Grader Edge for 16H or M – Patent Granted.



10" wide Heavy Duty Serrated Grader Edge for 16H or M

— Patent Granted.



24M Edges – Extra Wide Semi-Serrated – Patented.




A.R.M.* 24M Semi-Serrated option – Patented.



Close up of a new A.R.M.* Serrated cutting edge.



Overview of the new A.R.M.* Serrated Edge after 500 hours.

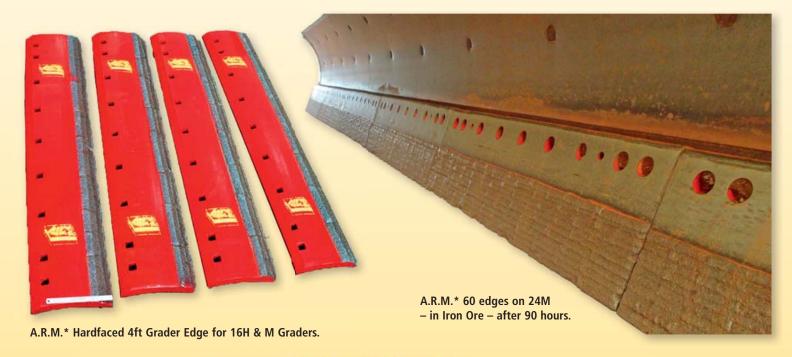





A.R.M.* 32mm thick 16H & M edges.



A.R.M.* 16H & M Semi-Serrated – 2" spacing.



A.R.M.* is an abbreviation of the company name Abrasion Resistant Materials

Contact: Tim Falkenhagen Mobile: 0419 021 470

Phone: (07) 3277 9630 **Fax:** (07) 3277 9640

Delivery: 1 Meakin Rd, Meadowbrook, Qld 4131

Postal: PO Box 1141, Beenleigh, Qld 4207

Email: armtim@arm.com.au Website: www.arm.com.au